




Model: VE-05 Electronic Dosing Pump

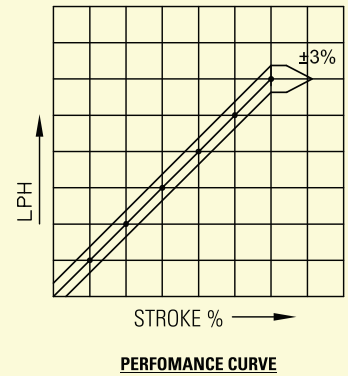

Material of Construction

Sr. No.	Parts	Material
01	Housing	GFPF
02	Liquid Head	PP/PTFE/SS304/SS316
03	NRV	PP/PTFE/SS304/SS316
04	NRV Ball	Ceramic/SS304/SS316
05	Diaphragm	Solid PTFE

Technical Details

Sr. No.	Model	VA05
01	Type	Solenoid Operated Electronic Dosing Pump
02	Input Power Supply	230V, 50Hz, 1 Phase
03	Input Power Consumption	80 Watt
04	Flow Adjustment	Enable to receive 4 to 20 mA Signal. Flow variation by automatic and manual. Digital display of SPM also available.
05	Negative Suction	1 mtr
06	End Connection	3/8" Hose Holder
07	Environment Temperature	45°C max.
08	Temperature Of Liquid Handled	50°C max
09	Shipping Weight	5.5 Kg

Standard Accessories

Sr. No.	Parts	MOC	Quantity
01	Suction & Discharge Piping	LDPE/PTFE	3 meter
02	Foot Valve Cum Strainer	PP	1
03	Antisiphoning valve	PP	1

Pressure in Kg	Capacity in LPH	SPM
1	19.25	120
2	18.48	120
3	17.71	120
4	16.94	120
5	16.17	120
6	15.4	120
7	14.63	120
8	13.86	120
9	13.09	120
10	12.36	120
11	11.55	120
12	10.78	120
13	10	120

