


## Model: VE-04 Electronic Dosing Pump

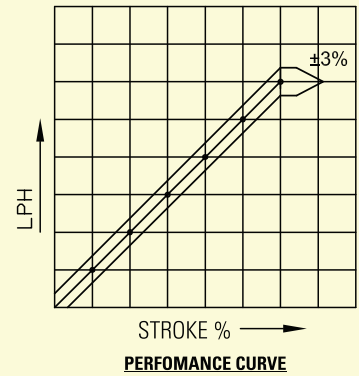

### Material of Construction

Sr. No.	Parts	Material
01	Housing	GFPF
02	Liquid Head	PP/PTFE/SS304/SS316
03	NRV	PP/PTFE/SS304/SS316
04	NRV Ball	Ceramic/SS304/SS316
05	Diaphragm	Solid PTFE

### Technical Details

Sr. No.	Model	VA04
01	Type	Solenoid Operated Electronic Dosing Pump
02	Input Power Supply	230V, 50Hz, 1 Phase
03	Input Power Consumption	80 Watt
04	Flow Adjustment	Enable to receive 4 to 20 mA Signal. Flow variation by automatic and manual. Digital display of SPM also available.
05	Negative Suction	1 mtr
06	End Connection	3/8" Hose Holder
07	Environment Temperature	45°C max.
08	Temperature Of Liquid Handled	50°C max
09	Shipping Weight	5.5 Kg

### Standard Accessories

Sr. No.	Parts	MOC	Quantity
01	Suction & Discharge Piping	LDPE/PTFE	3 meter
02	Foot Valve Cum Strainer	PP	1
03	Antisiphoning valve	PP	1

Pressure in Kg	Capacity in LPH	SPM
1	11.78	120
2	11.16	120
3	10.54	120
4	9.92	120
5	9.3	120
6	8.68	120
7	8.06	120
8	7.44	120
9	6.82	120
10	6.2	120

